



The EUDET Research Infrastructure for Detector R&D

J. Mnich*

October 28, 2008

Abstract

EUDET is an initiative supported by the European Union to improve infrastructures for detector R&D, in particular for the International Linear Collider (ILC). The programme is focused on providing support for larger scale prototype experiments as well as on facilitating collaborative efforts. The project encompasses developments for vertex detectors, gaseous and silicon tracking, and highly granular electromagnetic and hadron calorimeters. Now after three years the project is in full swing and most of the important key elements have been completed and successfully tested. This presentation will give an overview of the detector developing work and summarises the most important achievements of the different research activities.

This work is supported by the Commission of the European Communities under the 6th Framework Programme 'Structuring the European Research Area', contract number RII3-026126.

*Deutsches Elektronen Synchrotron DESY, Notkestr. 85, 22607 Hamburg, Germany

1 Introduction

Over the past years the detector R&D for the ILC has identified several candidate technologies for vertex and tracking detectors and calorimetry which meet the challenging demands for the physics at the ILC. Now the R&D efforts enter into a phase where these technologies have to be extended to larger prototype detectors to verify their feasibility and to optimise the overall detector performance. The EUDET project [1] provides with support from the European Union a framework for the development and construction of larger prototypes for ILC detector technologies. The project started in January 2006 for a duration of four years and it encompasses the design and construction of infrastructures for vertex and tracking detectors as well as electromagnetic, hadronic and forward calorimeters. Recently the consortium asked for a one year extension of the program to fully exploit the infrastructure. Most of these infrastructures will be initially commissioned at DESY but they are designed to be movable such that they can later be exploited at other laboratories in Europe and abroad. Even though EU funding can only be allocated to European groups the project is open to world-wide collaboration. Several non-European institutes are associated and contribute to the design and construction of the infrastructures anticipating their subsequent exploitation [2].

2 Testbeam Infrastructure

The goal of this activity is to provide a test beam with a large bore high field magnet and a high precision, fast beam telescope by upgrading an existing facility in Europe. The magnetic field of the superconducting magnet has been successfully measured and the field map is now available for users. This so-called demonstrator telescope comprises a precision mechanical structure, and monolithic active pixel sensors (MimoTel) with high signal-to-noise ratio and high single point resolution. A first version of the high precision beam telescope based on silicon pixel detectors was successfully commissioned and tested in particle beams at DESY and CERN in 2007 [3]. The readout hardware with high data transfer rate and synchronous operation was finalised for the analogue version of the telescope. A light-weight platform independent software completes the data acquisition system. Custom tracking software allows detailed analysis of the test beam data and was used to evaluate the telescope. A complete evaluation of the demonstrator telescope was performed using a sensor of a different technology as device under test. In summer 2008 five different groups were using the telescope for testing their prototypes at the SPS test beam at CERN. In order to improve the resolution to the required $1\ \mu\text{m}$ a high resolution pixel plane with a pixel pitch of $10\ \mu\text{m}$ (Mimosa18) will be added for some of these tests.

3 Tracking Detectors

The two main options for the main tracker of the ILC detector, Time Projection Chamber (TPC) and silicon strip detectors, are part of the EUDET programme. A large TPC

fieldcage is under construction to be equipped with GEM or MicroMegas based readout structures which have demonstrated in small prototypes their potential to achieve single point space resolutions of $100\ \mu\text{m}$ or below. To this aim the fieldcage will be equipped with a modular endplate to receive large surface gas amplification structures. The design of the TPC field cage has now been finalized and produced. Both versions of the readout electronics, ADC and TDC based, are fully designed and in production with many elements already in hand and tested. First versions of the necessary infrastructure including software are available and full functionality tested. The latest results will be discussed in this presentation.

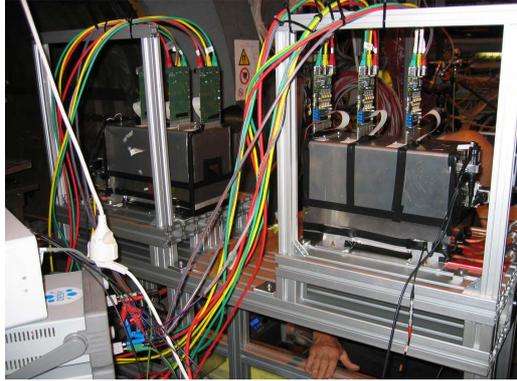


Figure 1: Photograph of the mechanical setup installed at CERN H8 test beam.

4 Calorimeter Infrastructure

The anticipated physics at the ILC requires calorimeters with unprecedented energy resolution, in particular for jets. Particle flow algorithms based on highly granular electromagnetic and hadronic calorimeters are considered to be a promising candidate to achieve the goals. In EUDET scalable prototypes for these main calorimeters are developed and constructed, together with developments of silicon sensors and calibration systems [4]. Fig. 2 shows the design of the tungsten absorber structure for an electromagnetic calorimeter which will partially be constructed from EUDET funds. It will be the basis for important studies towards the ILC detector calorimeter. Among the critical design issues is the power dissipation of the readout electronics which is completely embedded in the detector. The low duty cycle of the ILC (0.5%) can be exploited to power pulse the electronics avoiding cooling systems which would deteriorate the calorimeter performance. The ECAL task has achieved the completion of the designs of the slabs and electronics such that the construction of the infrastructure can commence in 2008. A similar detector architecture with embedded electronics is foreseen for the hadron calorimeter. It includes the development of very front end readout electronics ASICs for electromagnetic and hadron calorimeters on a common platform and a unified DAQ

system. First prototypes of ASICs and DAQ components have been produced and successfully tested. Also the construction of the HCAL infrastructure can commence in 2008.

5 Outlook

This paper will summarise the EUDET project and discuss the significant progress achieved since its start beginning of 2006. Examples of achievements are the TimePix chip, the commissioning of the large bore magnet and the first operational version of the beam telescope. In 2009 most of the remaining EUDET infrastructures are to be completed such that they can be exploited. The presentation will focus on the latest results of all three research activities as well as summarising the wide possibilities for the community to use these infrastructure.

6 Acknowledgement

This work is supported by the Commission of the European Communities under the 6th Framework Programme “Structuring the European Research Area”, contract number RII3-CT-2006-026126.

References

- [1] www.eudet.org
- [2] J. Mnich, “EUDET: Detector R&D Towards the International Linear Collider”, EUDET-Report-2007-10, Dec. 2007
- [3] A. Bulgheroni, “First Test Beam Results from the EUDET Pixel Telescope”, EUDET-Report-2007-06, Proc. of the IEEE NSS 2007 in Honolulu, USA
- [4] K. Gadow, E. Garutti, P. Göttlicher et al., “JRA3 Hadronic Calorimeter Technical Design Report”, Eudet-Memo-2008-02

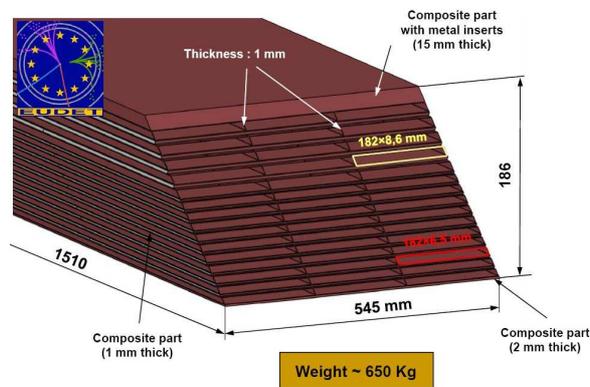


Figure 2: Design of a scalable tungsten based absorber structure for the development of an ILC electromagnetic calorimeter